

Technical Bulletin 0810 -BE/BSA



**World Class Performance
in Abrasive, Scaling and
Corrosive Slurries, Sludge,
Liquids, and Bulk Solids**

GERARDO SCHUFF

Arribeños 2913
1429 - Buenos Aires - Argentina
Tel.: (011) 4782-2875
E-mail: gschuff2@gmail.com



RF VALVE® aiRFlex®



RF Technologies' mission is to solve valve problems. We achieve this by providing valves that offer the lowest cost of ownership and operation, highest reliability and minimum maintenance.

Simple and rugged patented construction throughout sets RF valves apart in the most severe service and process control applications.



RF Manual Valves



RF Pneumatic Valves

On/Off and Control Valves

The RF Family of Elastomer Tubes

■ RF's patented non-stretch tube design features expansion arches that flex rather than stretch when closing. This gives RF valves remarkable wear resistance and cycle life superiority over conventional pinch valves. In addition, the tube arches and positive opening tags ensure tube stability under low or fluctuating line pressures and vacuum conditions. Full port and reduced port tubes permit precise throttling control.

■ RF tubes are available in a wide range of wear- and chemical-resistant elastomers. KEVLAR® reinforcing cords add unsurpassed performance under high loads and temperatures, and VITON® withstands even the most chemically corrosive process conditions.

Wear-Sensing Monitor

■ A patented SMART Valve™ Wear Monitoring Sensor is available and molded between the inner thick wear resistant elastomer and the outer reinforcing cords of each tube. If the inner lining wears sufficiently to disturb the sensor wire, it will trigger a signal that can be displayed at the valve or looped into a DCS. This provides for the first time a reliable tool to tell when a tube needs replacement, thus reducing downtime, outage costs and unexpected valve failures.



World Class Performance



RF Electric Valves



RF Control Valves



aiRFlex Pinch Valves

1" - 60" ID, full port, Standard ASME/ANSI B16.10, DIN 3205 F5/F15, and ISO 5752 face-to-face dimensions, working pressures 15 to 600 psi, temperatures -50° to 250° F, pH 1-13

Fugitive Emission Control

Fugitive Emission Control RF valves are built without valve stems, packings, and seals that can leak. Their seamless elastomer tube design, incorporating the wear sensor wire inside, offers two levels of protection. A third level of emission containment is provided by the sealed body feature.

Note: HON Rule Method 21 emission monitoring occurs inside a sealed valve body isolated from weather and harsh external operating environments, automating compliance process.

Technical Advantages

- Standard full- or reduced-port designs, centerline closure and Class VI shut-off provide outstanding elastomer wear life as well as precise, repeatable linear flow control.
- The self-cleaning, flexing action of the elastomer tubes prevents build-up of scaling deposits and thus guarantees that the valve will not jam or seize, even in high solids.
- High pressure molded elastomer tube insert outperforms more expensive 316, stellite, or alloy ball, plug, globe, diaphragm and conventional pinch valves in abrasive, scaling or corrosive services.
- Interchangeable with most standard ASME or DIN face-to-face dimensions for ball, plug, butterfly, globe and diaphragm valves. Versatile retrofit valve for plant upgrade and modernization projects.
- Elastomer tube is the only wear part in contact with process stream. Tube replacement, when required, is accomplished in-line without complicated tools, components, or specialized skills; maintenance costs are reduced up to 70 percent
- Seamless flange-to-flange tube construction and sealed body design eliminates valve stem, packings, or seals that can leak.




Control Valve Performance

Because of their unique design characteristics, RF Control Valves® are recommended when...

- ...abrasion and corrosion result in high maintenance,
- ...turbulent flow causes valves or pipes to wear,
- ...scaling causes valves to seize, and...
- ...fibers or other materials have a tendency to plug the valves.



Full Port



Reduced Port


The inherently high C_v values of RF Control Valves ensure superior cost-vs.-capacity ratios. Control performance is also enhanced, as each valve is uniquely characterized to flow requirements with either full- or reduced-port designs, thus reducing the turbulence and cavitation found in other valve designs.

The self-cleaning, flexing elastomer action loosens deposits (Fig. 2, opp. page) and eliminates most problems associated with stiction, overshoot, and conventional control valve irregularities.


When zero-leakage shut-off is a must, RF Control Valves® outperform most others, even against abrasive and scaling-prone slurries and liquids.

The RF Valve® and aiRFlex® are offered with a wide variety of positioners for modulating control and operating under most protocols, such as Hart, Foundation Fieldbus, Profibus and others.


FLOW CONTROL CURVE

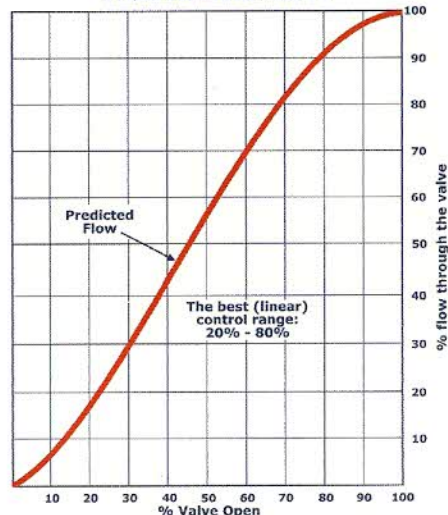

C_v values for standard full port face-to-face length RF valves, dia. 1" - 3"
(1/2" and 3/4" C_v valves are reduced port 1" dia. valves)

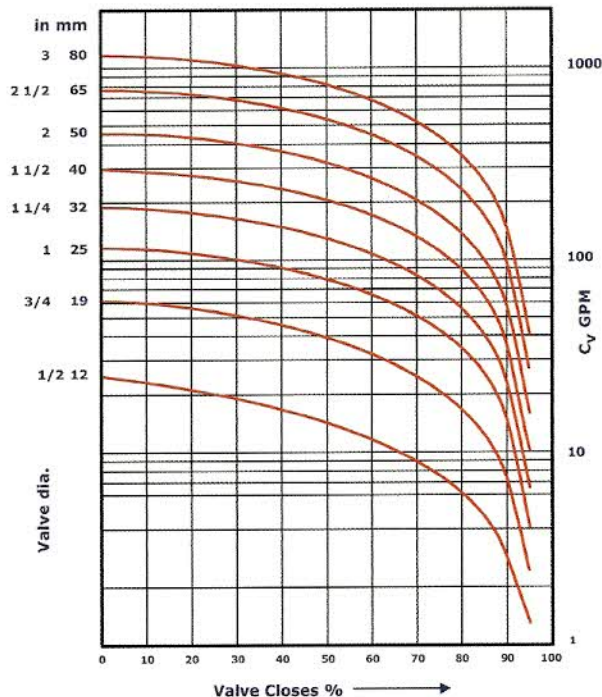

C_v values for standard full port face-to-face length RF valves, dia. 4" - 40"

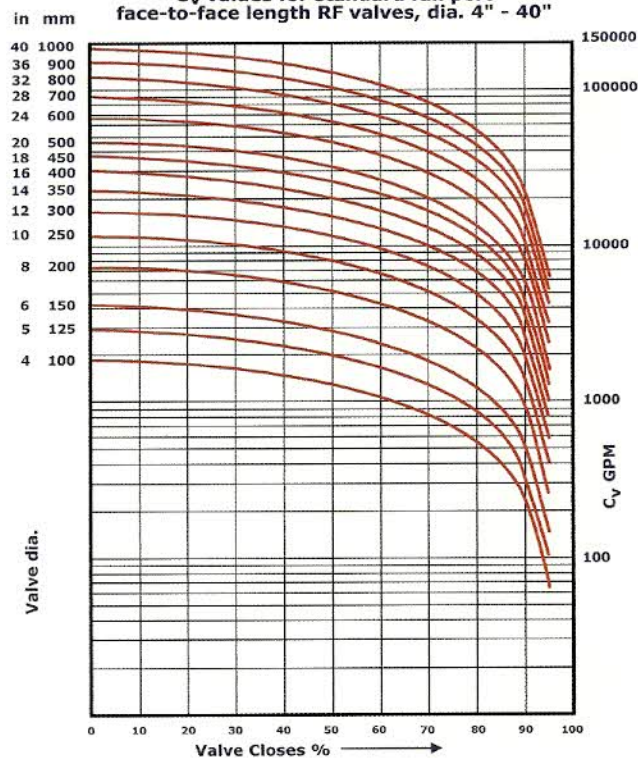

PATENTED NO-STRETCH TUBE FOLDS

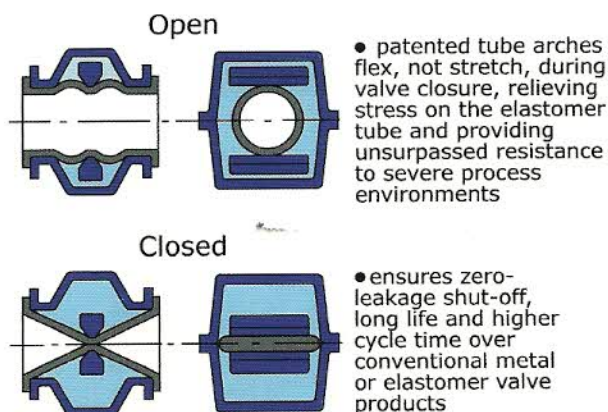


Figure 1

- Replaceable elastomer tube will not jam or seize; eliminates "throw away" valves (Figure 2).
- Smart Valve™ monitoring system reduces maintenance costs and unscheduled outages (Figure 3).
- Elastomer tube, when worn, is quickly replaced in line without special tools (Figure 4).

SMART VALVE™ MONITORING SYSTEM


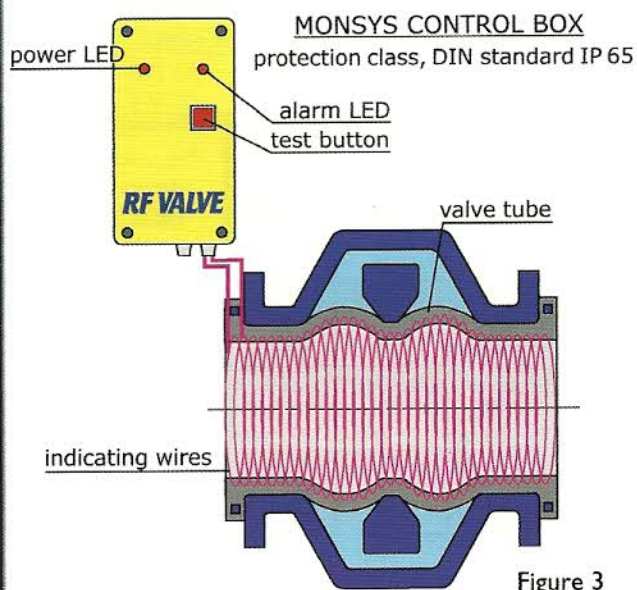


Figure 3

TROUBLE-FREE OPERATION

Valve Open

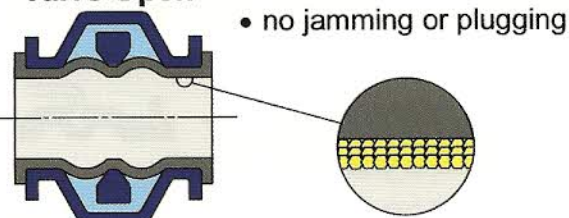

Valve Opens/Closes

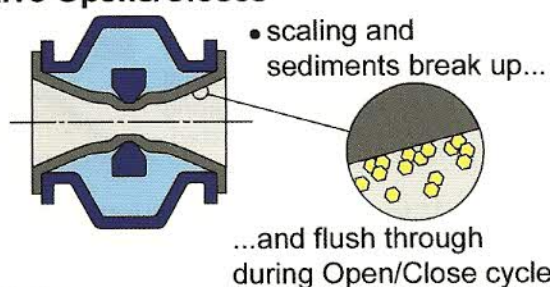


Figure 2

QUICK AND SIMPLE TUBE CHANGE

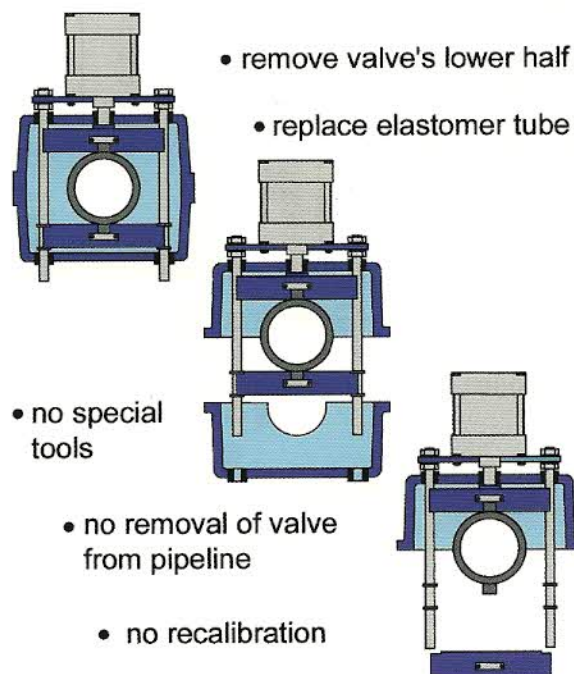


Figure 4



Specifications

RF Valve specifications are given at right; aiRFlex specifications are shown below.

aiRFlex®

Patented tube folds prevent tube from stretching when air is introduced between valve body and tube to close the valve. The folds and reinforcing cords insure full opening when actuating air is exhausted.



1" to 60" ID, full port, on/off and control services, standard ASME/ANSI B16.10 face-to-face dimensions, temperatures up to 210 degrees F, pH 1-13, working pressure 30 psi below available plant air with minimum 60 psi plant air needed to close the valve.

Valve ID ins.	A F-F ins.	B Wid. ins.	C Ht. ins.	Weight lbs. Cast Iron	Cast Alum.
1	5	5	4.2	6	3.5
1.5	6.5	5.9	5	11	5
2	7	8.1	6.5	17	7
3	8	10.1	7.9	27	14
4	9	11.6	9	37	17
5	10	12.3	10	52	24
6	10.5	15.2	11.2	66	43
8	18.3	13.4	15.2	152	77
10	21	24.3	16		155
12	24	28.2	19		205
14	27	27.9	26.8		284

Sizes larger than 14" ID are available upon request.


General Accessories

RF Technologies' complete line of valve accessories ensures optimum field performance:

- On/off limit switches
- Fail Close systems
- Air operated hydraulic power packs
- Manual overrides
- Positive opening tags
- Hand wheel lockout
- SMART Valve™ Monsys Alarm Box
- Positioners: 3-15 psi and 4-20 mA
- Solenoid and air valves

RF VALVE®
ASME/ANSI
Standard Valves


Dimensions = inches
Weight = lbs
Pressure = psig




PNEUMATIC

Actuator, Line Pressure			P15	P90	P150
DN	Weight		20	20	20
1	A = 5	C	16 1/8	16 1/8	16 1/2
	B = 7 1/8	D	12 3/8	12 3/8	12 3/4
	Weight		22	22	24
1 1/4	A = 5 1/2	C	17	17	17 3/8
	B = 7 5/8	D	13	13	13 1/4
	Weight		26	26	31
1 1/2	A = 6 1/2	C	17	18 3/8	18 3/8
	B = 8 1/8	D	12 5/8	13 7/8	13 7/8
	Weight		44	44	46
2	A = 7	C	19 3/4	19 3/4	20 1/8
	B = 9 1/2	D	14 1/4	14 1/4	15 1/2
	Weight		55	57	62
2 1/2	A = 7 1/2	C	17 3/4	21 5/8	21 5/8
	B = 9 1/2	D	15 3/8	15 3/4	15 3/4
	Weight		60	66	73
3	A = 8	C	23 1/4	23 5/8	26 1/4
	B = 11 1/8	D	16 7/8	16 7/8	18 1/2
	Weight		84	93	99
4	A = 9	C	27 3/8	28 3/4	28 3/4
	B = 12 1/2	D	19 1/4	20 1/2	20 1/2
	Weight		121	132	150
5	A = 10	C	30 1/2	31 3/4	31 7/8
	B = 13 1/2	D	21 1/4	22 5/8	22 3/4
	Weight		168	185	203
6	A = 10 1/2	C	35 1/2	35 5/8	41 3/8
	B = 15 3/4	D	23 5/8	26 1/2	31 1/8
	Weight		348	381	458
8 long	A = 18	C	43 3/8	47 5/8	58 1/8
	B = 20 3/8	D	29 3/4	34 1/4	45 5/8
	Weight		373	494	637
10	A = 21	C	49 1/4	65 3/4	74 1/2
	B = 22	D	33 7/8	50 7/8	59 1/8
	Weight		787	820	
12	A = 24	C	56 3/4	83 1/2	
	B = 28 3/8	D	38 5/8	65 3/4	
	Weight		1169		
14	A = 27	C	63 3/4		
	B = 33 1/8	D	43 3/8		
	Weight		1257		
16	A = 30	C	70 7/8		
	B = 42 1/2	D	48		
	Weight		1433		
18	A = 34	C	78		
	B = 46 1/2	D	52 1/2		
	Weight		1532		
20	A = 36	C	85 1/2		
	B = 50 3/8	D	57 1/8		
	Weight		2062		
24	A = 42	C	130 3/4		
	B = 53 1/8	D	97 5/8		
	Weight				


The weights and dimensions in this table are only approximate and may change with different actuators or accessories. Please contact RF Technologies, Inc. if more detailed information is needed.




SEALED BODY PNEUM.



HYDRAULIC



ELECTRIC



MANUAL

P15	P90	P150	H15	H90	H150	E15	E90	E150	M15	M90	M150
26	26	29	26	26	26	55	55	55	20	20	20
19 1/4	19 1/4	19 7/8	16 7/8	16 7/8	16 7/8	20 7/8	20 7/8	20 7/8	15 1/8	15 1/8	15 1/8
9 5/8	9 5/8	7/8	13 1/8	13 1/8	13 1/8	16 7/8	16 7/8	16 7/8	10 7/8	10 7/8	10 7/8
26	26	31	29	29	29	51	51	51	22	22	22
20 1/8	20 1/8	20 3/4	17 3/4	17 3/4	17 3/4	21 5/8	21 5/8	21 5/8	16	16	16
10	10	10 3/8	13 5/8	13 5/8	13 5/8	17 3/8	17 3/8	17 3/8	11	11	11
31	31	35	31	31	31	55	55	55	26	26	26
21 1/8	21 3/4	21 3/4	18 1/2	18 1/2	18 1/2	22 1/2	22 1/2	22 1/2	16 7/8	16 7/8	16 7/8
10 1/2	10 7/8	10 7/8	13 3/4	13 3/4	13 3/4	17 7/8	17 7/8	17 7/8	12 3/4	12 3/4	12 3/4
55	55	60	35	35	35	71	71	71	44	44	44
22 7/8	22 7/8	23 1/2	20 1/8	20 1/8	20 1/2	23	23	23	17 7/8	17 7/8	17 7/8
11 1/2	11 1/2	11 3/4	13 3/8	13 3/8	13 3/4	16	16	16	12 3/4	12 3/4	12 3/4
68	73	82	55	55	55	86	86	88	55	55	55
24 1/4	24 3/4	24 3/4	22 5/8	23 1/4	23	25 1/4	25 1/4	25 1/4	19 1/8	19 1/8	19 1/8
12 1/8	12 3/8	12 3/8	15 3/8	15 3/4	15 3/4	17 1/2	17 1/2	17 1/2	13 5/8	13 5/8	13 5/8
73	79	95	66	66	66	95	95	95	66	66	66
26	26 3/8	29 1/8	24 3/4	25 1/4	26 3/4	26 3/4	26 3/4	26 3/4	20 1/4	20 1/4	20 1/4
13	13 1/8	14 1/2	16 7/8	17 3/8	18 7/8	18 1/2	18 1/2	18 1/2	14 1/8	14 1/8	14 1/8
88	99	110	79	79	88	95	95	95	84	84	84
30 3/8	33 1/8	33 1/8	28 3/8	29 7/8	26 3/8	23	23	23	26 3/4	26 3/4	26 3/4
15 1/8	16 1/2	16 1/2	18 7/8	20 1/2	20 1/2	19 1/4	19 1/4	19 1/4	18 7/8	18 7/8	18 7/8
128	128	161	143	143	154	115	119	123	132	132	132
32 5/8	35	35 7/8	31 1/8	33 1/8	33 1/8	31 3/8	31 3/8	31 3/8	29 3/8	29 3/8	29 3/8
16 3/8	17 1/2	17 7/8	20 5/8	22 5/8	22 7/8	20 1/2	20 1/2	20 1/2	25 7/8	25 7/8	25 7/8
176	194	221	168	179	190	150	150	159	190	190	190
38 5/8	39	47 5/8	35 1/2	37	41 3/8	34 1/4	34 1/4	34 1/4	35 1/2	35 1/2	35 1/2
19 1/4	19 1/2	23 7/8	23 5/8	25 1/4	29 1/2	22	22	22	25 1/4	25 1/4	25 1/4
325	392	486	348	348	392	363	381	453	348	348	348
45 1/4	54 3/4	75 3/8	43 3/8	50	50	40 1/2	0 1/2	42 1/8	43 3/8	43 3/8	43 3/8
22 5/8	27 3/8	37 3/4	29 1/8	35	35	25 5/8	25 5/8	27 1/8	31 1/2	31 1/2	31 1/2
434	567	745	362	384	406	399	476	509	465	476	476
50	83 1/2	100 3/8	53 1/2	58 1/4	58 1/4	47 1/4	48 7/8	49 1/4	50 3/8	50 3/8	50 3/8
25	41 3/4	50 1/4	36 1/4	41	41	29 1/8	30 7/8	30 7/8	35	35	35
432	948		666	688	721	613	679	767	591	591	657
56 3/8	111		62	67 3/8	67 3/4	54	55 7/8	57 1/8	57 1/8	57 1/8	57 1/8
28 1/8	55 1/2		41 3/4	46 1/2	46 7/8	32 5/8	34 5/8	35 1/2	39 3/4	39 3/4	39 3/4
917			787	820	942	922	1032	1473	789	789	878
62 3/4			70 1/8	75 5/8	76	60 1/4	62 1/4	63 3/8	63	63 3/4	63 3/4
31 3/8			47	52	52 3/8	36 1/4	37 7/8	39	44 1/2	45 1/4	45 1/4
1345			1169	1235	1422	1367	1521	2007	1125	1235	1389
69 1/8			78 3/8	83 7/8	84 5/8	68 1/8	69 1/4	70 1/8	77 1/8	78	78
34 1/2			52 3/4	57 1/2	57 7/8	41 3/8	42 1/2	42 1/2	51 3/8	52	52
1557			1283	1349	1570	1605	2112	2245	1252	1385	1715
75 3/8			91 3/4	92 1/2	92 7/8	74 7/8	76 3/8	78	83 7/8	84 5/8	84 5/8
37 3/4			63	63	63 5/8	44 7/8	46 1/8	47 5/8	57 1/2	58 1/4	58 1/4
1665			1466	1643	1907	1731	2194	2326	1488	1665	1996
81 3/4			100 3/8	100 3/4	101 1/2	81 1/2	82 3/4	84 5/8	91 3/4	92 1/2	92 1/2
40 7/8			68 1/2	68 1/2	69 1/4	48 1/2	49 5/8	51 1/8	62	63	63
2304			1797	1951	2084	1907	2547	3076	1797	2172	
155 1/2			117 3/4	118 1/8	118 7/8	94 1/2	97 1/2	100 3/8	68 7/8	69 1/4	
77 3/4			79 7/8	79 7/8	0 3/8	55 7/8	58 1/4	61 3/8	52	52 3/8	

RF Valves offers standard center-line closure in order to maximize the useful life of each elastomer tube, both in On/Off and Modulating services.

ELASTOMER QUALITIES SELECTION

Elastomer Type	Natural Rubber	Natural Pure Gum Rubber	Chloro-Butyl Rubber	Nitrile Rubber	Chloro-prene Rubber	Fluoro-Carbon Rubber	Chloro-Sulfonated Polyethylene	Ethylene Propylene
Designation	NR	PGR	IIR	NBR	N	FPM	CSM	EPDM
Tradename ⁽¹⁾				Buna-N	Neoprene	Viton®	Hypalon®	Nordel®
Properties								
Temperature of application:								
- Maximum °F	180	210	280	250	225	250*	260	250*
- Contin. Operating Temp. ⁺	150-160	105-175	240-250	215-220	215-220	215-220	215-220	215-220
- Minimum °F	-65	-60	-60	-40	-40	-5	-40	-60
Elasticity	5	5	2	3.4	3.4	2	3.4	3.4
Resistance								
- Weather & Ozone	1..2	1..2	4	1..2	3..4	5	5	5
- Acids	2..3	2..4	4	3	3	3..4	4	3..4
- Alkaline	2..3	2..4	4	2..3	3	1..3	4	3..4
- Hydrocarbons, aliphatic	1	1	1	4	2..3	4	2..3	1
- Hydrocarbons, aromatic	1	1	1	3	1..2	4	1	1
- Water	5	5	3..4	5	3	4	3..4	5
- Wear	4..5	4..5	2..3	3..4	3..4	3	3	3
- Flame	1	1	1	1..2	3..4	4	3	1
- Electrical	4	3..4	4..5	1..2	3	3	3..4	4
Gas Impermeability	3	2..3	5	2..3	2..3	4	4	2..3

5 = Excellent, 4 = Very Good, 3 = Good, 2 = Fair, 1 = Not Recommended

*FPM HT and EPDM HT available for temperatures up to 250° F

Food Grade elastomers are available in NBR, N, and EPDM

White elastomers (TiO₂ filled) are available in N and EPDM

+Based on Nylon cords; Kevlar® cords are specified for temperatures over 220° F

Viton®, Nordel®, Hypalon® and Kevlar® are registered trademarks of E.I. du Pont de Nemours and Company or its affiliates

RF VALVES
"The Best in Pinch Valve Performance!"
US: 1-811-309-1029
Europe: +352-20-785-1790
World-Class Performance in
Adhesive, Sealing and
Corrosive Slurries, Solids,
Liquids and Bulk Solids

Pinch Valves
On-Off Pinch Valves
Modulating Pinch Valves

Applications & Industries
Industrial Applications
Municipal Applications


RF Valves is a leading manufacturer of pinch valves and has a long history of providing high quality products to a wide range of industries. Our products are used in a variety of applications, including the handling of corrosive slurries, solids, liquids and bulk solids. We have a proven track record of providing reliable and durable products that meet the most demanding requirements of our customers.

RF Valves is a leading manufacturer of pinch valves and has a long history of providing high quality products to a wide range of industries. Our products are used in a variety of applications, including the handling of corrosive slurries, solids, liquids and bulk solids. We have a proven track record of providing reliable and durable products that meet the most demanding requirements of our customers.

Be sure to visit our Website
<http://www.rfvalve.com>
for latest industry updates.

We provide the world's most complete line of pinch valves in standard ASME/ANSI B16, DIN and ISO face-to-face dimensions from 1" to 60" ID!

With manufacturing facilities in the US, Finland and South America — and with sales and support facilities in North and South America, Europe, Asia, the Middle East and Africa — RF Technologies supplies the mining, industrial minerals, power generation, chemical, pulp & paper and waste treatment industries around the globe. Wherever your business is located, RF Technologies is dedicated to providing you with the world's most complete line of pinch valves in standard ASME/ANSI B16, DIN and ISO face-to-face dimensions from 1" to 60" ID!



Headquarters:
RF Technologies, Inc.
9017 Mendenhall Court
Columbia, MD 21045, USA
Tel: 410-309-1029 Fax: 410-309-1033
email: rfvalves@rfvalve.com
www.rfvalve.com

GERARDO SCHUFF
Arribeños 2913
1429 - Buenos Aires - Argentina
Tel.: (011) 4782-2875
E-mail: gschuff2@gmail.com